

5 μ H Line Impedance Stabilisation Network

1 Introduction

The TBL0550-1B is an affordable 5 μ H LISN designed for conducted emission measurements / line termination in the frequency range of 100 kHz to 400 MHz. It complies with CISPR-25 (EN 55025), numerous automotive manufacturer standards, MIL-STD-461F, DO-160, AECTP-500 and ISO 7637-2.

LISNs are inserted into the supply lines of the EUT (Equipment Under Test). Conducted noise which is present at the supply terminals of the EUT can be measured at the BNC connectors using a spectrum analyzer or a measurement receiver. The source (supply) terminal and the EUT terminal are decoupled by a 5 μ H inductor.

Two TBL0550-1B in combination with the Tekbox LISN Mate enable separate measurement of common mode and differential mode noise.



5 μ H Line Impedance Stabilisation Network

2 Specification

Topology: single path, configurable, 50 Ω // 5 μ H + 1 Ω , 50 Ω // 5 μ H; the internal capacitor can be disconnected for ISO 7637-2 and DO-160 set ups; an external 10 μ F capacitor is required for DO-160; the LISN is factory setup to 50 Ω // 5 μ H + 1 Ω , other configurations require setting of an internal high current jumper.

Supported standards: CISPR 16-1-2, CISPR 25, MIL-STD-461G, DO-160, ISO11452-4 and ISO 7637-2

Characterized frequency range: 10 kHz – 400 MHz

DC Resistance: < 5 m Ω Source+ to EUT+; < 5 m Ω Source- to EUT-

Maximum current: 50A continuous; see plot with heat up characteristics, chapter 1.8

Maximum operating voltage range: 0 – 250V AC @50/60 Hz, 130V AC @ 400Hz, 250V DC.

Absolute maximum rating of internal components: 450V DC.

EUT connector: binding post, M6, 4mm center hole, 63A, 1kV, Schützinger POL 631 L

SOURCE connector: binding post, M6, 4mm center hole, 63A, 1kV, Schützinger POL 631 L

EARTH: 6 mm Earth stud with wing-nut, exposed stainless steel bottom panel with mounting slots and countersunk hole for 4mm screw

Jumper: Harwin D3087-98

Dimensions: 125 mm x 125 mm x 275 mm **Weight:** 1.75 kg

3 Warning

Spectrum Analyzer / Measurement Receiver protection:

The TBL0550-1B LISN does not contain any protective elements in the RF path. Use an external attenuator and/or limiter to protect the spectrum analyzer / measurement receiver input from harmful transients or high RF noise levels.

Safety:

Because of the CISPR 16-1-2, CISPR 25 (EN 55025), MIL-STD-461G and DO-160 design requirements, LISNs do not do not comply with the maximum permissible leakage current as specified in EN61010-1. Furthermore, LISNs do not fulfil the isolation requirements of CAT II.

The LISN housing is connected to the negative / ground SOURCE and EUT pin of the terminal block and the ground of the RF connector. Inadvertently connecting the positive voltage or line voltage to the ground pin puts you at risk of a lethal electric shock. The TBL0550-1B is exclusively for use in laboratories and must be operated by qualified personnel.

5µH Line Impedance Stabilisation Network

4 Principle schematic

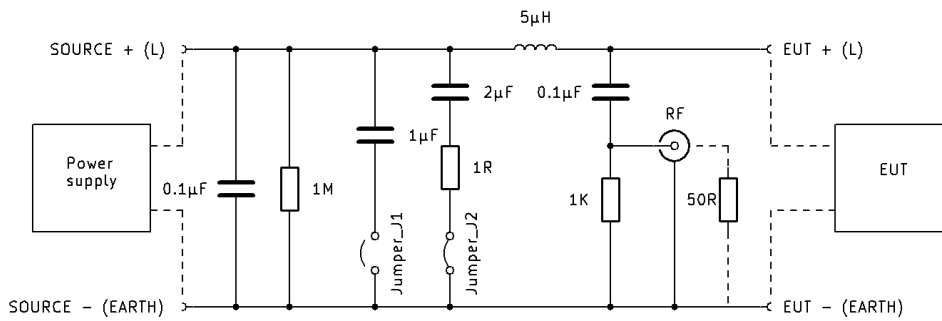


Figure 1: principle schematic

Standards	Jumper J1	Jumper J2
CISPR 16-1-2; CISPR 25: 50Ω // 5µH + 1Ω	open	shorted
CISPR 25, MIL-STD-461G, ISO 11452-4: 50Ω // 5µH	shorted	open
CISPR 25 High Voltage Artificial Network (HV-AN)	open	open
DO-160; 10µF capacitor attached to source terminals	open	open
ISO 7637-2	open	open

To access the jumpers, the housing cover must be removed. Re-attach it after setting the jumpers. Refer to the table above, or to the table on the silkscreen print of the PCB. There are an unconnected parking positions for the jumpers, position (J3) + (J4).

5 Impedance

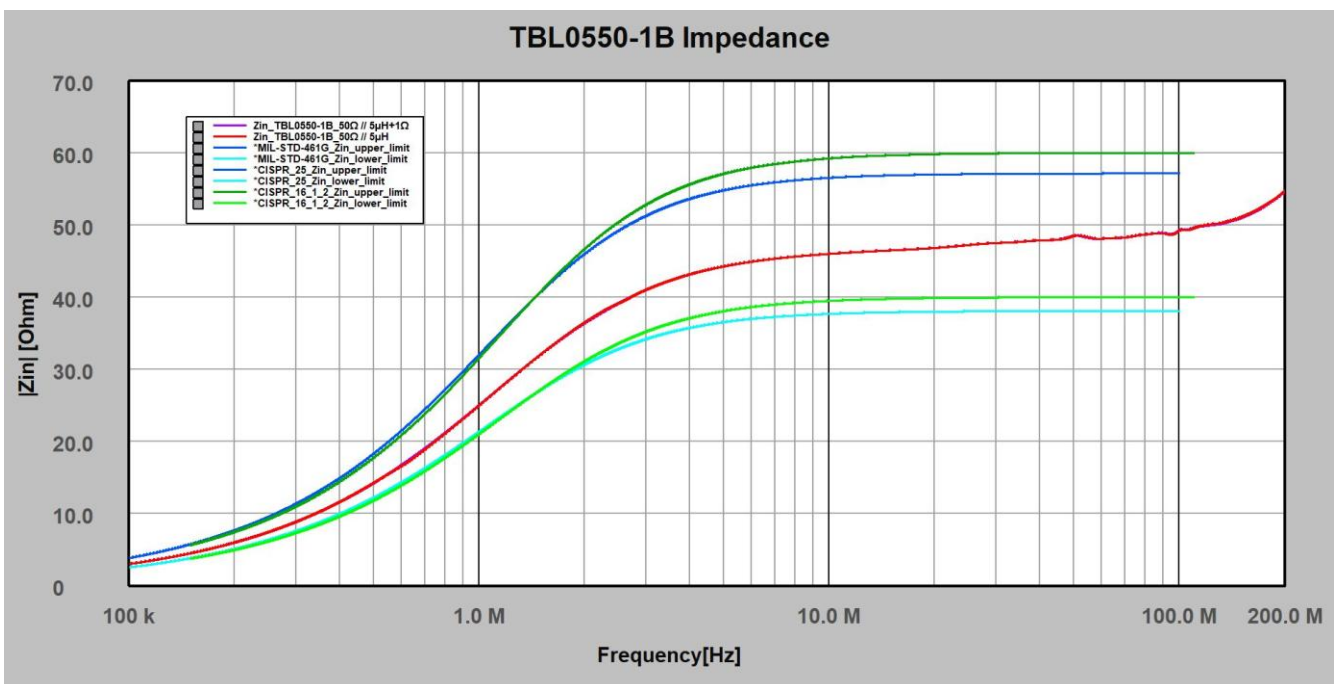


Figure 2: TBL0550-1B impedance , 100 kHz – 110 MHz, 50Ω // 5µH+1Ω, 50Ω // 5µH, source terminals shorted

5 μ H Line Impedance Stabilisation Network

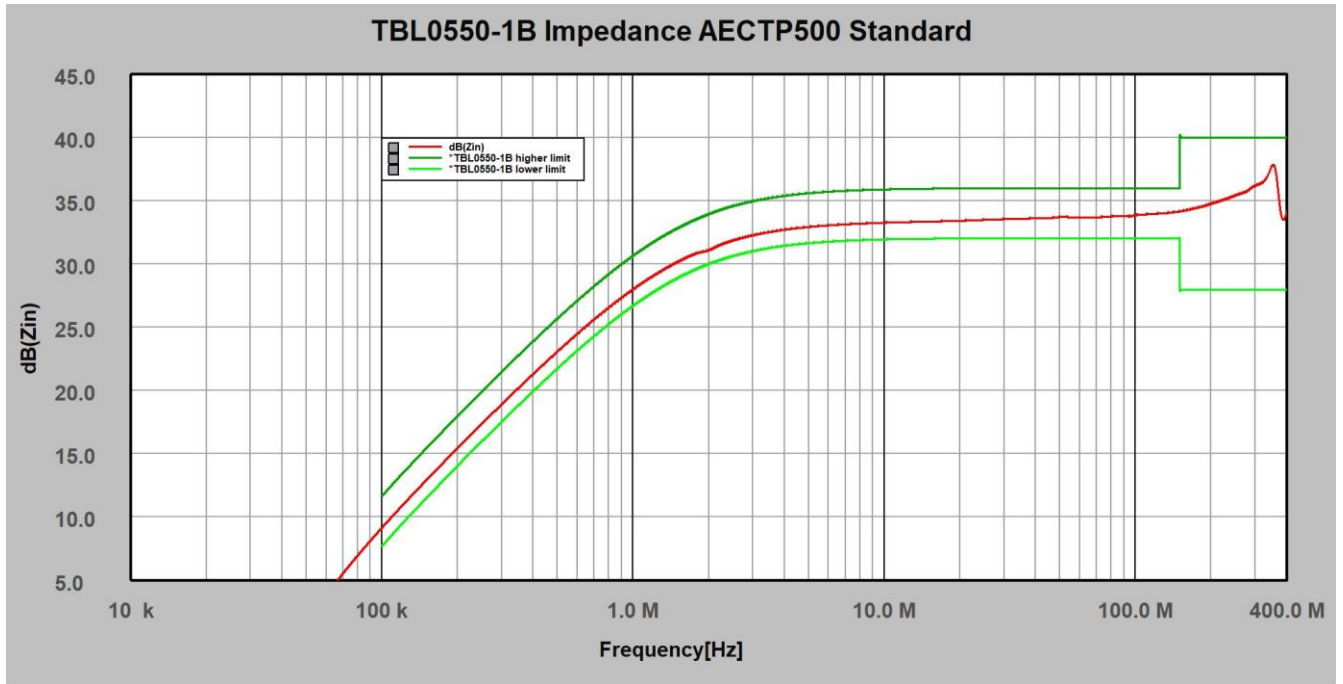


Figure 3: 100 kHz – 400 MHz, logarithmic impedance of the TBL0550-1B 5 μ H LISN, AECTP-500 limits

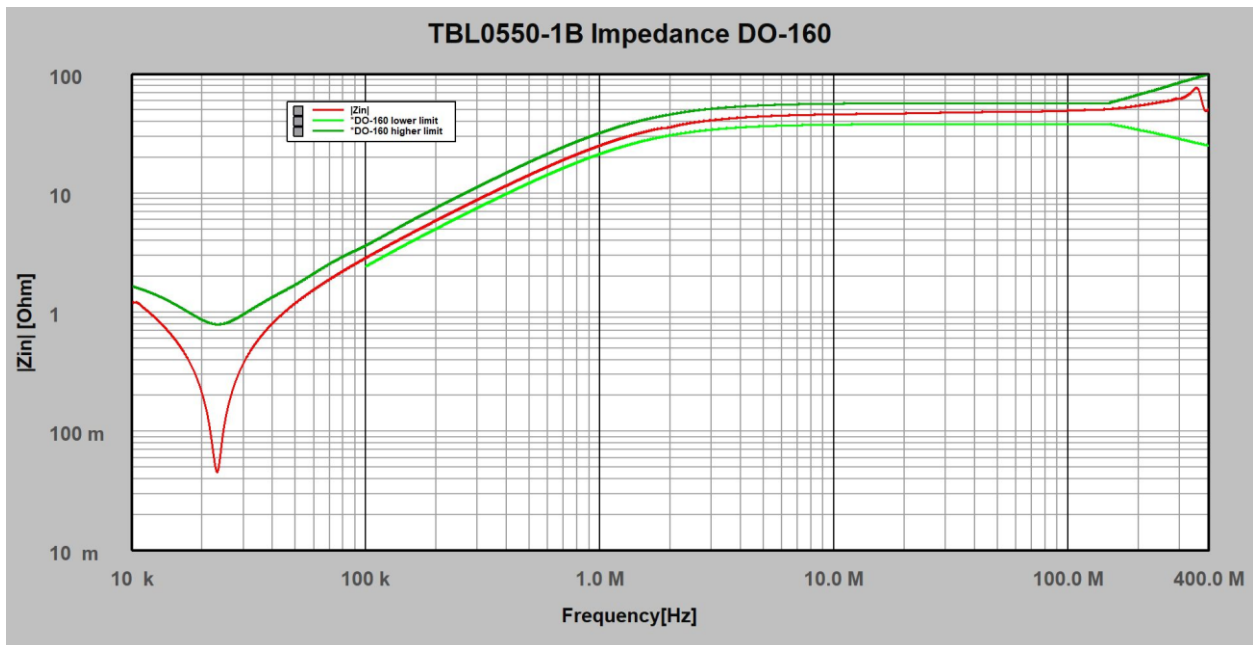


Figure 4: 100 kHz – 400 MHz, impedance of the TBL0550-1B 5 μ H LISN with additional 10 μ F capacitor clamped to the source terminals, DO-160 limits

5 μ H Line Impedance Stabilisation Network

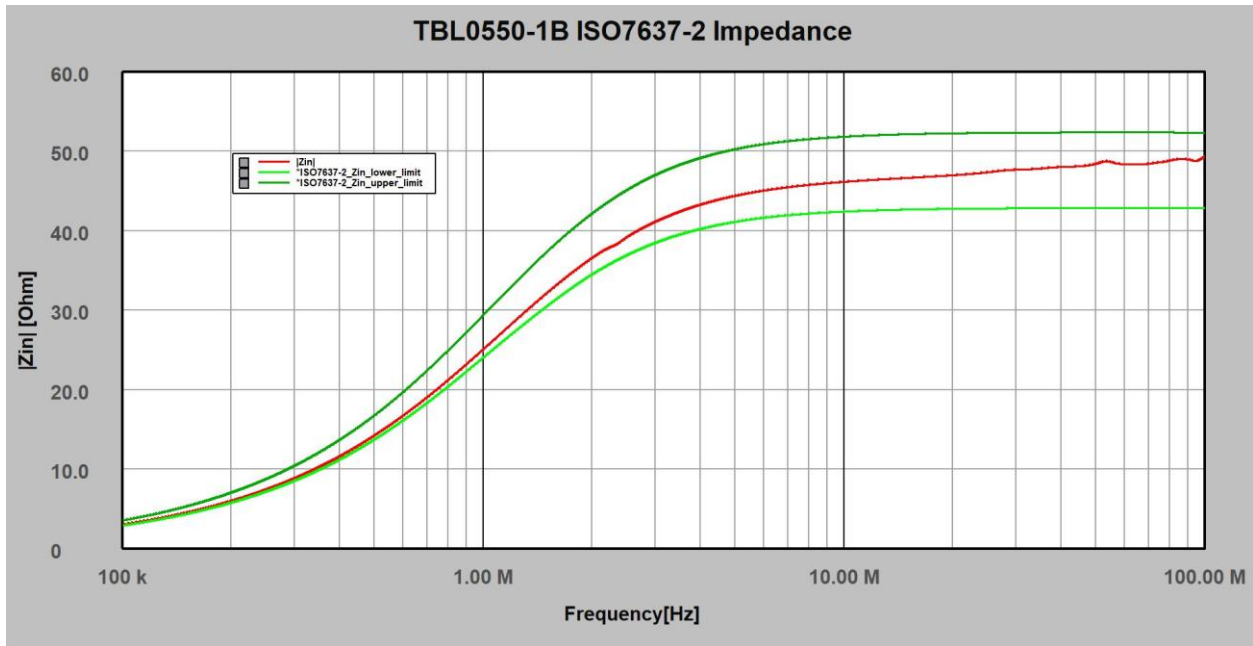


Figure 5: 100 kHz – 100 MHz, impedance of the TBL0550-1B 5 μ H LISN, ISO 7637-2 impedance*

6 Isolation

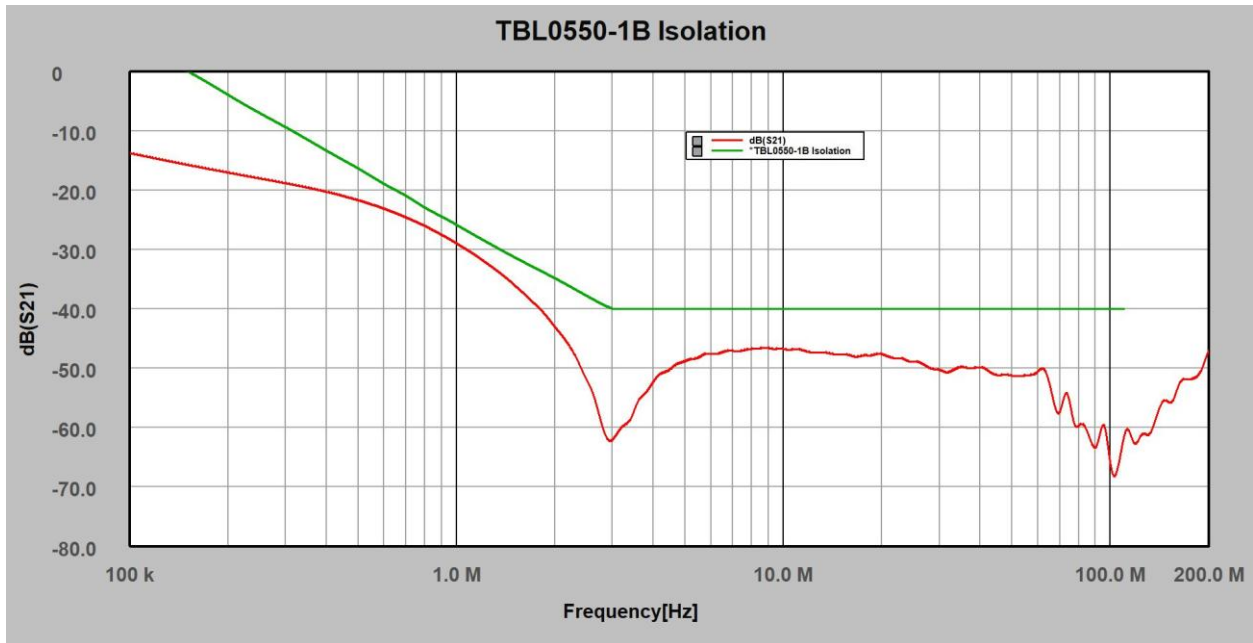


Figure 6: LISN Isolation, 100 kHz – 110MHz, 50 Ω // 5 μ H+1 Ω

5 μ H Line Impedance Stabilisation Network

7 Voltage Division Ratio

Calibration set up according to CISPR 16-1-2 Annex A.8.

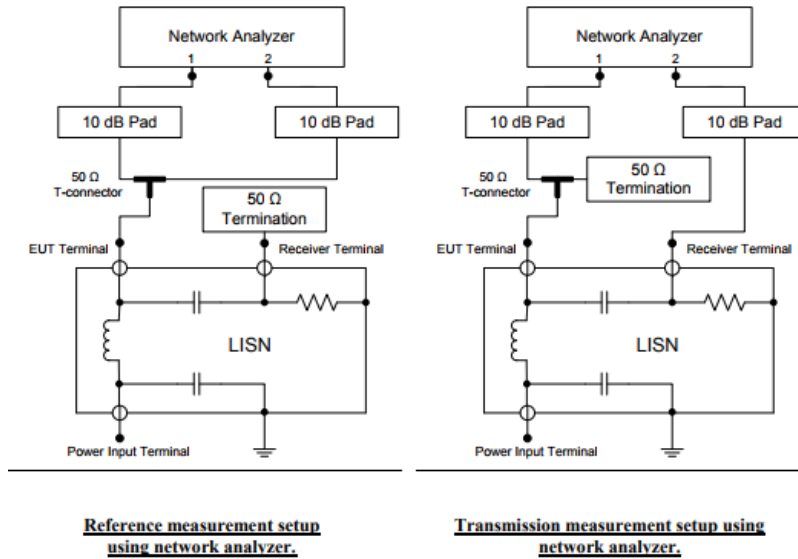


Figure 7 – Calibration set up according to CISPR 16-1-2 Annex A.8.

The voltage division ratio is a correction factor that needs to be applied to the levels measured at the LISN RF output.

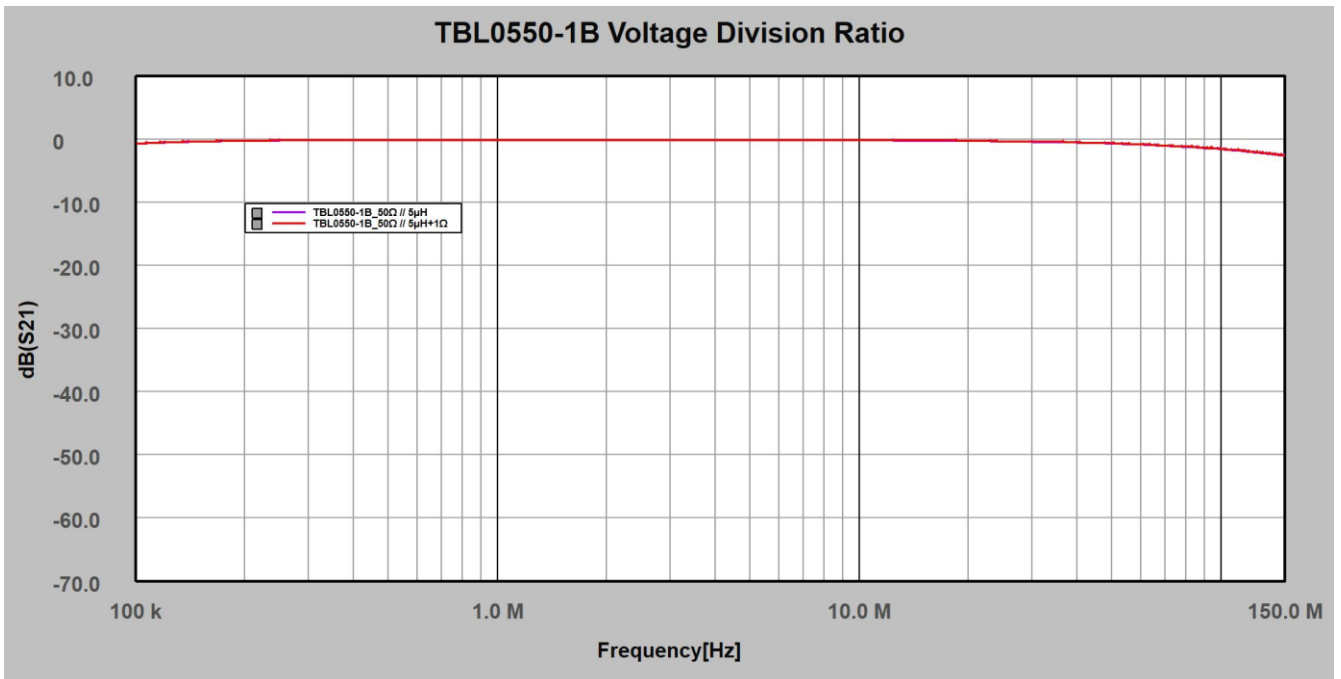


Figure 8: Voltage division ratio EUT terminals to RF connector; 100kHz – 200 MHz; 50 Ω // 5 μ H+1 Ω ; 50 Ω // 5 μ H

5µH Line Impedance Stabilisation Network

Frequency [MHz]	VDR [dB] 50Ω // 5µH+1Ω	VDR [dB] 50Ω // 5µH	Frequency [MHz]	VDR [dB] 50Ω // 5µH+1Ω	VDR [dB] 50Ω // 5µH
0.1	-0.69	-0.73	10	-0.15	-0.17
0.125	-0.49	-0.49	20	-0.22	-0.25
0.15	-0.36	-0.38	30	-0.41	-0.43
0.175	-0.29	-0.3	40	-0.51	-0.54
0.2	-0.25	-0.26	50	-0.64	-0.68
0.25	-0.19	-0.2	60	-0.82	-0.85
0.5	-0.12	-0.13	70	-1.02	-1.06
0.75	-0.1	-0.12	80	-1.15	-1.21
1	-0.1	-0.11	90	-1.39	-1.43
1.2	-0.1	-0.11	100	-1.53	-1.58
1.5	-0.1	-0.11	110	-1.72	-1.77
2	-0.1	-0.12	120	-1.97	-2.02
2.5	-0.1	-0.12	130	-2.17	-2.22
5	-0.11	-0.13	140	-2.36	-2.43
7.5	-0.13	-0.15	150	-2.57	-2.63

Table 1: 100 kHz – 150 MHz, voltage division

A correction file with the voltage division ratio for use with the EMCview software can be downloaded from the TBL0550-1B product page.

8 Phase

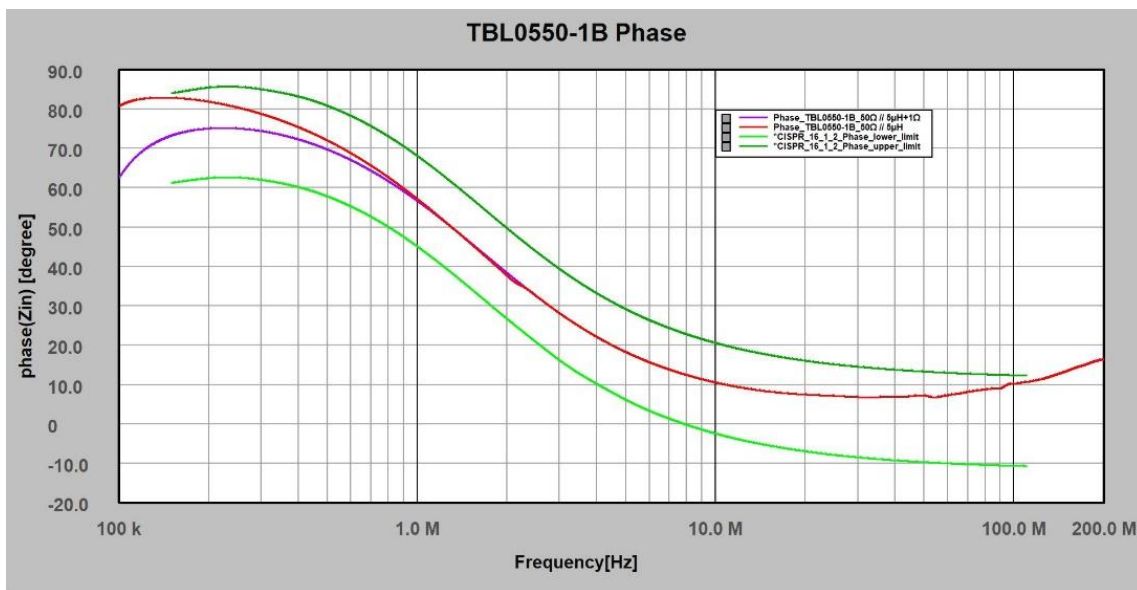


Figure 9: 150 kHz – 110 MHz, Phase angle of impedance with CISPR-16-1-2 limits; the other standards do not specify phase requirements

5µH Line Impedance Stabilisation Network

9 Heat up characteristics

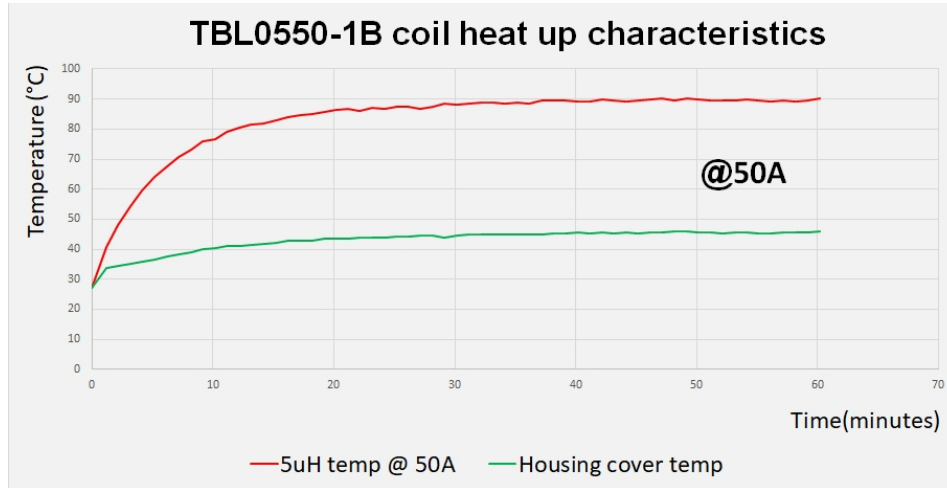


Figure 10: Heat up characteristics of LISN housing and 5µH inductor

The LISN can be continuously loaded with 50A supply current.

10 Source capacitors:

DO-160 requires an external 10µF capacitor in parallel to the source terminals. ISO7637-2 requires the internal source capacitors to be disconnected by removing jumpers J1 and J2.

11 Application

Visit our product website to download application notes related to the setup and use of LISNs. Moreover, you will find many product related video links and other useful information.

12 Ordering Information

Part Number	Description
TBL0550-1B	5µH LISN, 1 pc. 75 cm N-male to N-male RG223 cable Factory calibration certificate and data

Table 3 – Ordering information

5 μ H Line Impedance Stabilisation Network

13 History

Version	Date	Author	Changes
V1.0	14.04.2026	Mayerhofer	Creation of the document

Table 4 – History

TekBox Digital Solutions Vietnam Pte. Ltd.

www.tekbox.com

Factory 4, F4, Lot I-3B-1, Saigon Hi-Tech Park, Tan Phu Ward, Thu Duc, Ho Chi Minh City, Vietnam